

PRODUCT INSTALLATION AND INSTRUCTIONS

SHOWER SHELF 1026, 1044, 1049, 1054, 1861

S P A Z A

SCREW AND WALL PLUG

WALL PLUG

Drilling diameter:
8 mm in concrete or brick
7 mm in ALC concrete

Minimum drilling depth:
50 mm


SCREW

Pozidriv-Z cross-head screw
5.5x50 mm in stainless steel A2

Drill bit
PZD3

INSTALLATION

1. Choose your location on a solid concrete or brick wall (1)
2. Align the installation template (2) and mark the drill holes
3. Remove the installation template and drill holes in the wall (3)
4. Put the plugs (4) in the wall
5. Mount the shelf (5) with screws

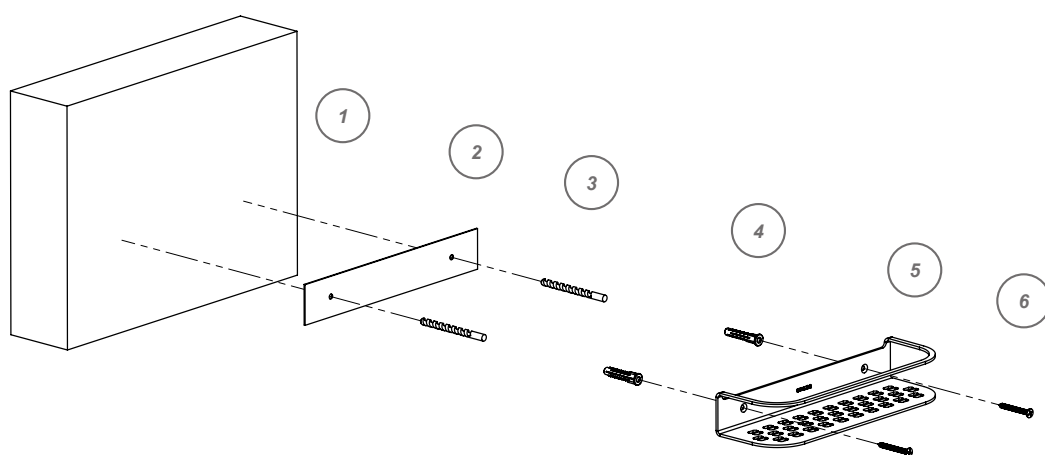

PRODUCT CARE

Do not under any circumstances use strong solvents such as thinners or solutions containing chlorinated hydrocarbons, esters or ketones. Abrasive cleaners or cutting compounds should not be used.

MATERIALS AND ENVIRONMENT

The materials in this product and accessories may be recyclable. Please check the recycling rules in your community and if recycling facilities exist in your area. Manufactured in Sweden.

Shelf:

Powder coated matte black stainless steel (ID.1026)

Powder coated matte white stainless steel (ID.1054)

Powder coated silver stainless steel (ID.1044)

Electropolished stainless steel (ID.1861)

Gold plated stainless steel (ID.1049)

Installation template:

Steel


Screw:

Stainless steel

Wall plug:

PEHD (polyethylene high density)

TECHNICAL DIMENSIONS

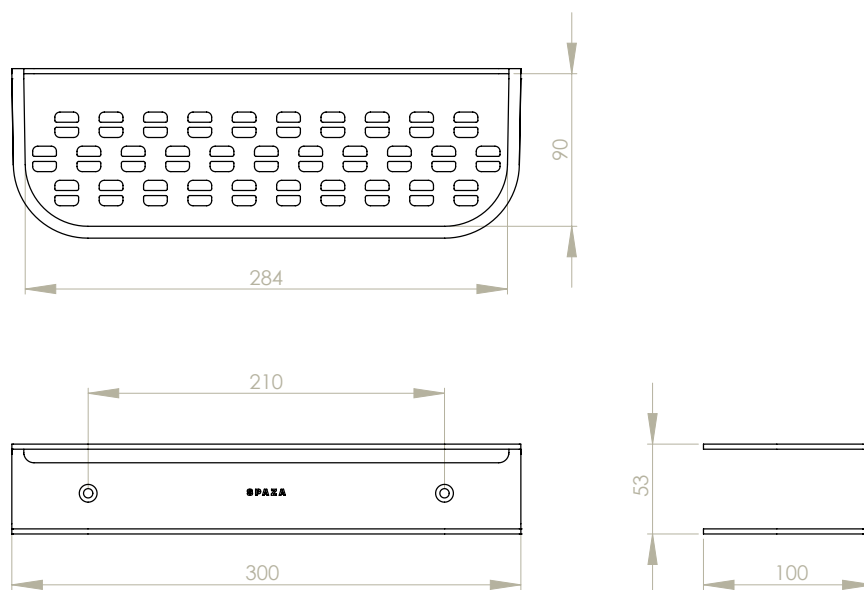

CONTACT

For all sales related inquiries, please call +46762171155 or email to sales@spaza.se and christian@spaza.se.

For technical support, please email to info@spaza.se.